



G2G Trident DF

A SIMPLE SOLUTION
For Sign Cabinet Lighting



SPECIFICATIONS

Luminous Efficacy	93.3 LM/W
Power	4.5W/FT
Max Mods (Series)	Full 68W load
CT	6300K/7500K
CRI	>70
LEDs Per Module	3
Protection	IP66 wet-Location
Operating Temp	-40°~ +60 °C
Warranty	7 Years
LED	SMD 2835
Packaging	30 modules per tray, 5trays per case



c **UL** [®] us **IP66**
E344189

- Constant Voltage Technology
- UV or IR Protected
- L70 rating of 50,000 hours
- 3M double face tape and mechanical mounting options


RECOMMENDED COVERAGE CHART

Depth	10"	12"	14"	16"
Spacing	10"	12"	12"	12"

OPTIONS

Model	Voltage	Power	Current	Modules Per Ft	Lumens	Qty 60 Power Supply	Viewing Angle
G2G Trident DF	12VDC	4.5W/Module	375mA	1	420 Lm/Module	13 Modules	160°

DRAWINGS

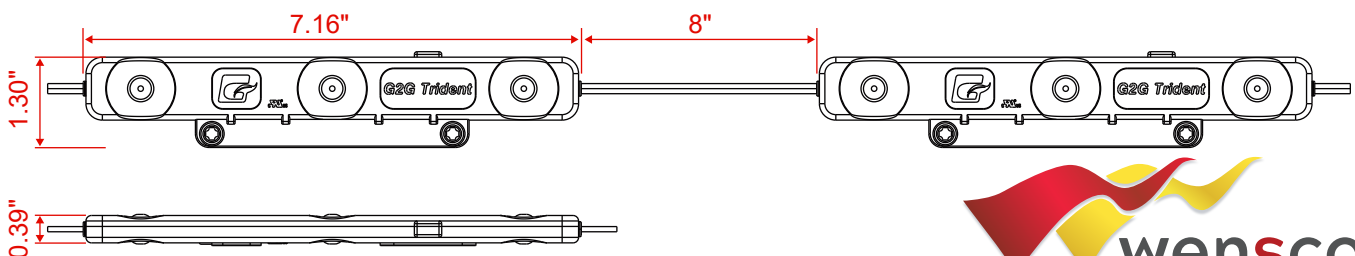

800.253.1569 | wensco.com