



CORE APPLICATIONS:

- CHANNEL LETTERS
 - > SMALL | SHALLOW | THIN
- ACCENT LIGHTING
- COVE LIGHTING




GREAT LENS. SMALL BODY.

- L70** 5+ years **LIFESPAN**
- 7P/7L** WARRANTY
- IP67** DRY / DAMP / WET
- 40° ~ 140°** OPERATING TEMPERATURE
- TOTAL SYSTEM** (Dollar sign icon)
- MECHANICAL FASTENING** (Screw icon)
- EASY PEEL** 3M LINER VHB
- CCT RANGE** SINGLE BIN
- TRU** CONSTANT CURRENT

TRULUME MODULE TYPE	PRODUCT NUMBER	TEMPS / COLORS	LUMEN PER MOD	EFFICIENCY	LUMENS PER FT	MODS PER FT	POWER PER MODS / FT	# MODS / FT PER 60W P. S.	MAX. SERIAL CONNECTION	MODS/FT PER BAG	BAGS PER CARTON
12v Uno 71K	19842-01	7100K	53	148 Lm/W	119	2.26	0.36 W {0.82 W FT.}	166 Mods {73 FT.}	45 Mods {19 FT.}	135 Mods {59 FT.}	20 Bags {2,700 MODS}
12v Uno 5K	19842-02	5000K	53	148 Lm/W	119	2.26					
12v Uno 35K	19842-03	3500K	53	148 Lm/W	119	2.26					
12v Uno Red	19842-04	625nm	14	38 Lm/W	31	2.26					
12v Uno Green	19842-05	525nm	18	50 Lm/W	40	2.26					
12v Uno Blue	19842-06	460nm	7	19 Lm/W	15	2.26					

Note: Custom Kelvin Temperatures Available Upon Request

LIGHT BEAM PATTERN

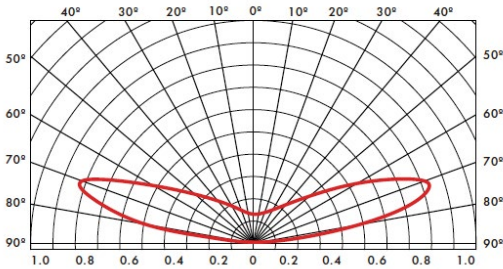

170° Lens

SPACING & USAGE CHART

CHANNEL / SIGN DEPTH	2"	3"	4"	5"
Single Row Spacing - Max Stoke	6"	7"	8"	10"
Multiple Row Spacing	4"	5"	6"	8"

NOTE: Product and depth may vary depending on face material and desired brightness. Testing conducted using 7328 acrylic.



QUICK LINKS

CLICKABLE ON PDF ONLY

WHITE MODULE SELECTION GUIDE

COLOR MODULE SELECTION GUIDE

12V UNO PRODUCT VIDEO

