



CORE APPLICATIONS:

- CHANNEL LETTERS
 - > SMALL | SHALLOW | THIN
- ACCENT LIGHTING
- COVE LIGHTING



GREAT LENS. SMALL BODY.

L70
5+ years
LIFESPAN

7P/7L
WARRANTY

IP67
DRY / DAMP / WET

-40°
140°
OPERATING TEMPERATURE

TOTAL SYSTEM
\$

MECHANICAL
FASTENING

EASY PEEL
3M LINER
VHB


CCT RANGE
SINGLE BIN

TRU
CONSTANT CURRENT

TRULUME MODULE TYPE	PRODUCT NUMBER	TEMPS / COLORS	LUMEN PER MOD	EFFICIENCY	LUMENS PER FT	MODS PER FT	POWER PER MODS / FT	# MODS / FT PER 100W P. S.	MAX. SERIAL CONNECTION	MODS/FT PER BAG	BAGS PER CARTON
24v Uno 71K	20864-01	7100K	53	148 Lm/W	119	2.26	0.36 W {0.82 W FT.}	266 Mods {73 FT.}	45 Mods {19 FT.}	135 Mods {59 FT.}	20 Bags {2,700 MODS}
24v Uno 5K	20864-02	5000K	53	148 Lm/W	119	2.26					
24v Uno 35K	20864-03	3500K	53	148 Lm/W	119	2.26					
24v Uno Red	20864-04	625nm	14	38 Lm/W	31	2.26					
24v Uno Green	20864-05	525nm	18	50 Lm/W	40	2.26					
24v Uno Blue	20864-06	460nm	7	19 Lm/W	15	2.26					

Note: Custom Kelvin Temperatures Available Upon Request

LIGHT BEAM PATTERN

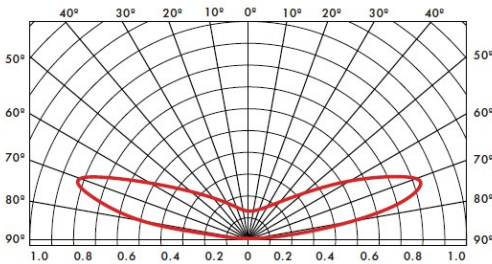

170° Lens

SPACING & USAGE CHART

CHANNEL / SIGN DEPTH	2"	3"	4"	5"
Single Row Spacing - Max Stoke	6"	7"	8"	10"
Multiple Row Spacing	4"	5"	6"	8"

NOTE: Product and depth may vary depending on face material and desired brightness. Testing conducted using 7328 acrylic.



QUICK LINKS

- CLICKABLE ON PDF ONLY
- WHITE MODULE SELECTION GUIDE
- COLOR MODULE SELECTION GUIDE
- 24V UNO PRODUCT VIDEO - COMING SOON

