

CHANNEL LETTER


LED LIGHTING

INSTALLATION GUIDE




800.253.1569 | wensco.com

QIS Connection Diagram

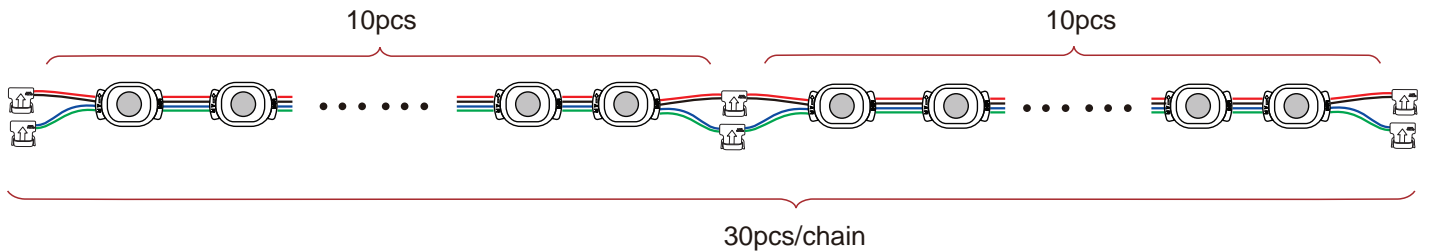

1. Start to connect before the first module (start at both ends).
2. Every additional connector is after every 10 module.
3. Can cascade every 20 module with center pointing.
4. Using the most middle on the chain as the position of connection.

Sign Cabinet Installation Overview



PDC (Outdoor)




Power Cable (Outdoor)



Single-end Male Connector

G2G TriCo MINI RGB
Wires instruction

- Positive Jumper
- Address Jumper
- Data+, Signal Jumper
- Negative Jumper

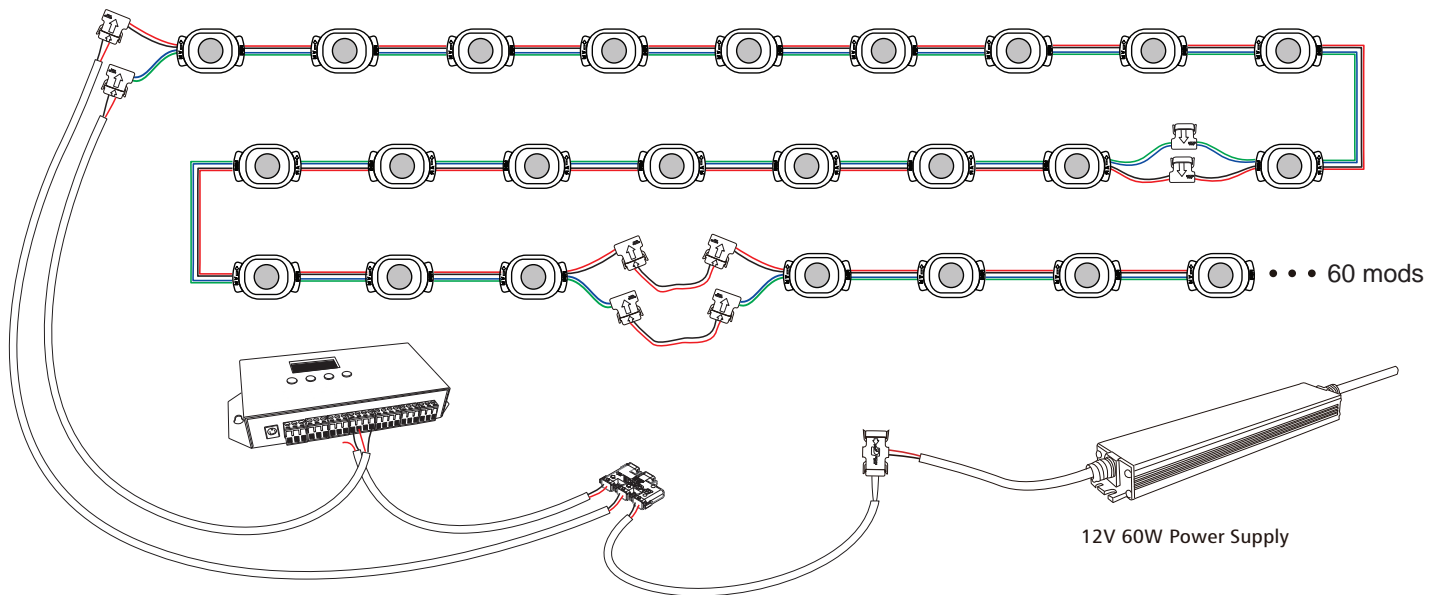

1829 Underwood Blvd, Unit 5, Delran Twp, NJ 08075
T 973-575-2600 F 973-575-2603

ALL COMPONENTS **cALUS**
www.g2glighting.com

CHANNEL LETTER LED LIGHTING

INSTALLATION GUIDE




800.253.1569 | wensco.com

Quick Installation System Guide:

1. Connect Single-end male connector to controller, connect and daisy chain the modules as shown in the wiring diagram.
2. Using a Single-end male connector, connect to the first PDC connector for power. Connect the bare black wire to the port, as indicated in the wiring diagram. Terminate the red wire.

Power & Data Wiring Overview

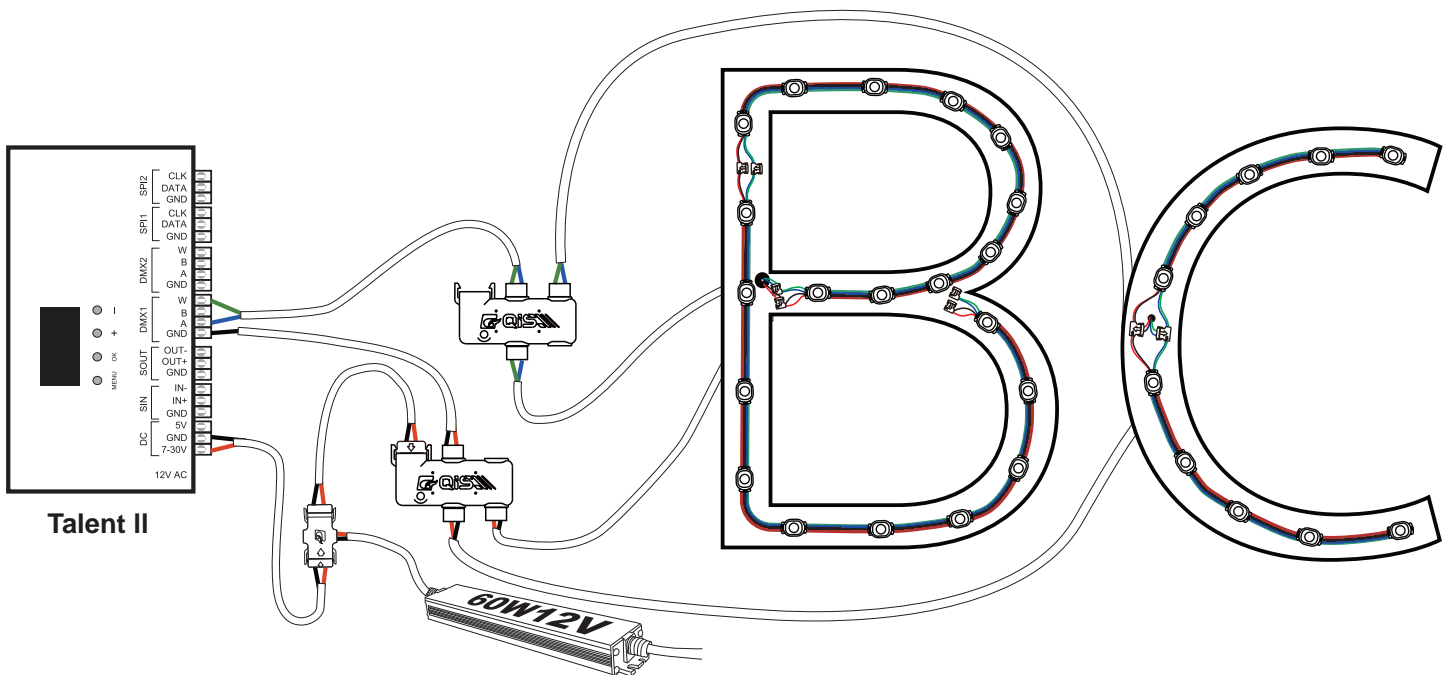



- ① Power Distribution Connector (PDC Indoor)
- ② 12V/60W QIS Power Supply
- ③ Double-End Male Connector (Outdoor)
- ④ Single-End Male Connector (Outdoor)
- ⑤ Double-End Male Connector (Indoor)
- ⑥ Double-End Male Connector (Indoor for Data)

CHANNEL LETTER LED LIGHTING


INSTALLATION GUIDE



800.253.1569 | wensco.com

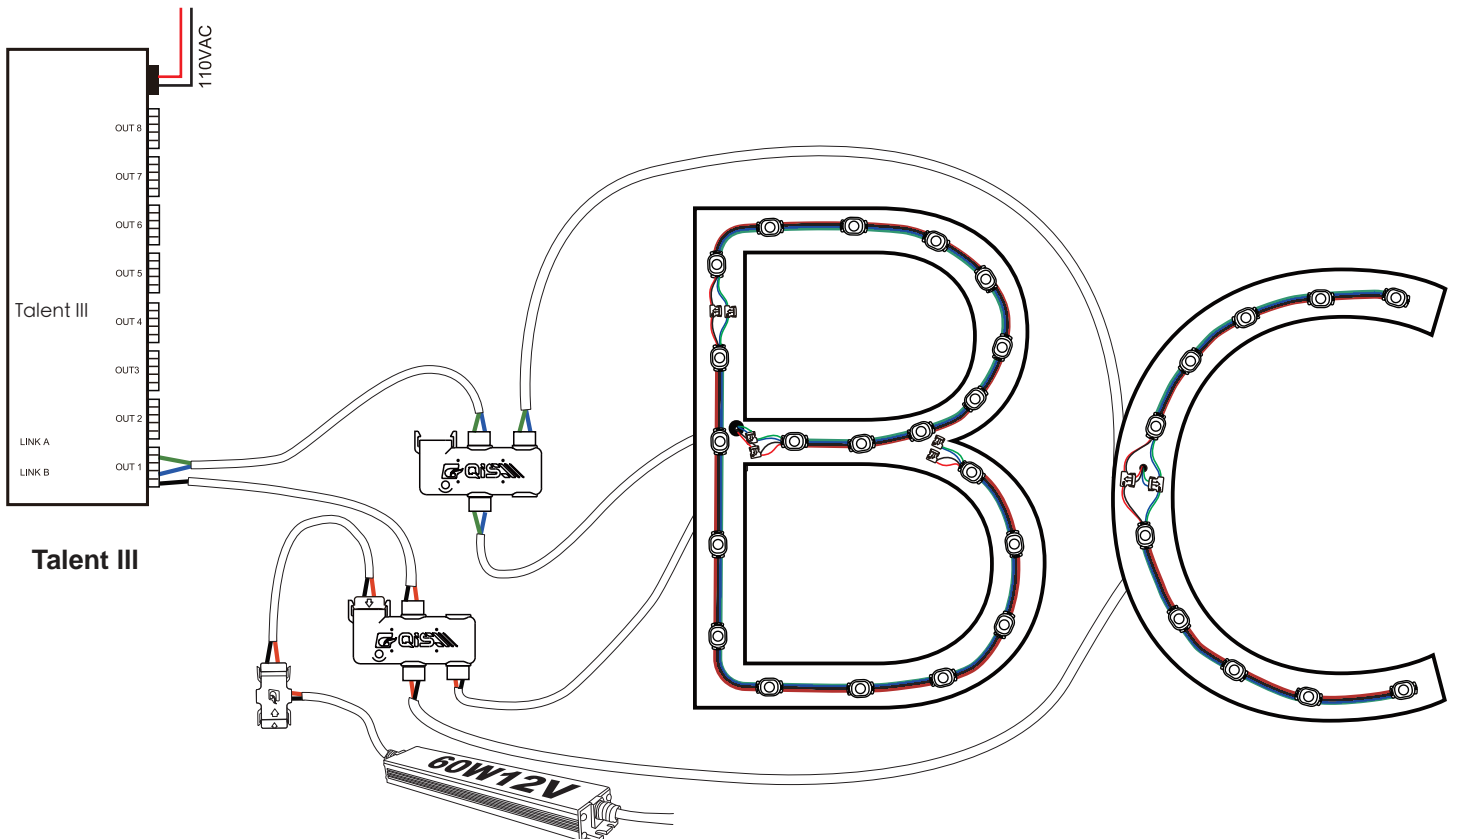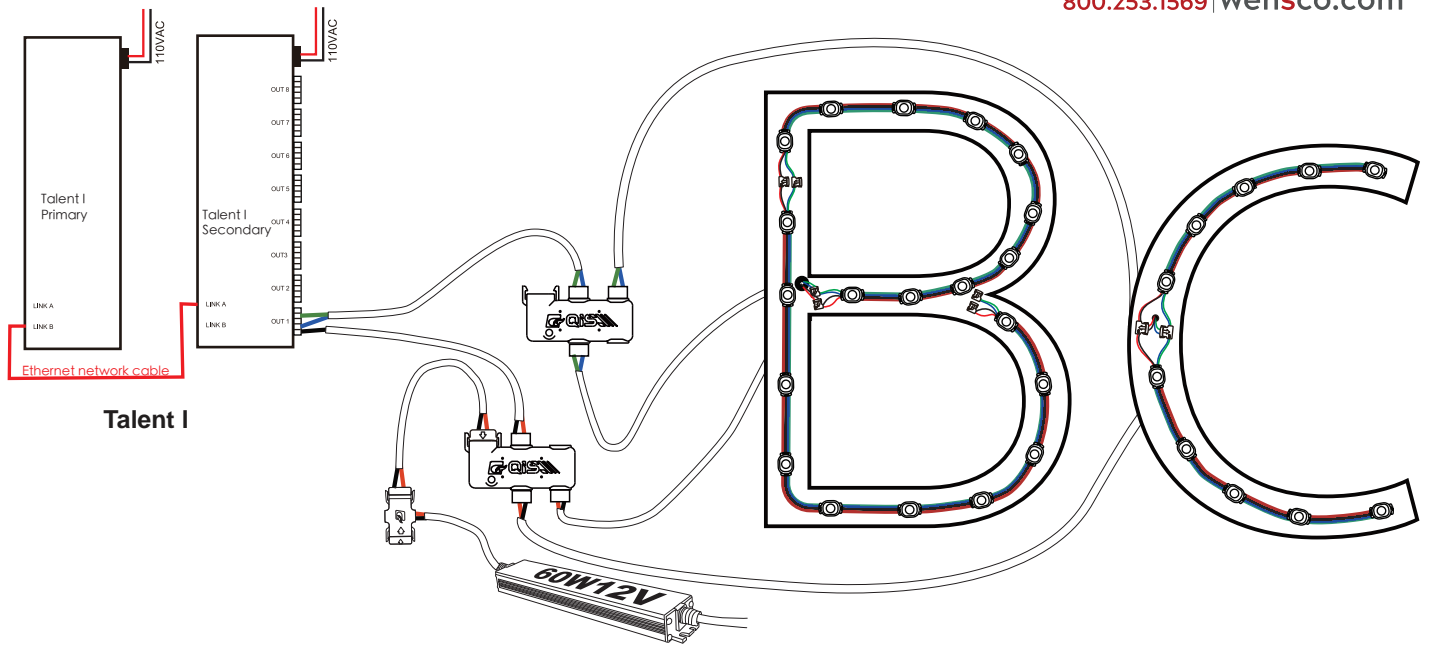

1829 Underwood Blvd, Unit 5, Delran Twp, NJ 08075
T 973-575-2600 F 973-575-2603

ALL COMPONENTS c  us
www.g2glighting.com