

# 24v TRIO



LED MODULES

## CORE APPLICATIONS:

### CHANNEL LETTERS

- > STANDARD | SHALLOW | WIDE | DEEP

### CABINET / BOX SIGNS

- > STANDARD | SHALLOW | CLOUD

### ACCENT & COVE LIGHTING



170°  
OPTICS




## THE DUO'S BIG BROTHER



TRULUME MODULE TYPE	PRODUCT NUMBER	TEMPS / COLORS	LUMEN PER MOD	EFFICIENCY	LUMENS PER FT	MODS PER FT	POWER PER MODS / FT	# MODS / FT PER 100W P.S.	MAX. SERIAL CONNECTION	MODS/FT PER BAG	BAGS PER CARTON
24v Trio 71K	20859-01	7100K	148	154 Lm/W	222	1.5	0.96 W {1.44 W FT.}	100 Mods {40 FT.}	25 Mods {16 FT.}	50 Mods {33 FT.}	16 Bags {800 MODS}
24v Trio 5K	20859-02	5000K	148	154 Lm/W	222	1.5					
24v Trio 35K	20859-03	3500K	148	154 Lm/W	222	1.5					
24v Trio Red	20859-04	625nm	42	43 Lm/W	63	1.5					
24v Trio Green	20859-05	525nm	54	56 Lm/W	81	1.5					
24v Trio Blue	20859-06	460nm	21	21 Lm/W	31	1.5					

Note: Custom Kelvin Temperatures Available Upon Request

### LIGHT BEAM PATTERN

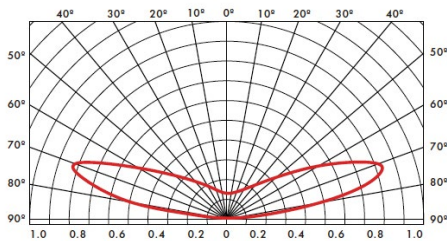

170° Lens

### SPACING & USAGE CHART

CHANNEL / SIGN DEPTH	2"	3"	4"	5"
Single Row Spacing- Max Stroke	7*	10"	12"	14"
Multiple Row Spacing	6*	9"	11"	13"

Note: Product and depth may vary depending on face material and desired brightness. Testing conducted using 7328 acrylic.

\*Have to move in modules approximately a third of the distance.

Testing for verification is needed




### QUICK LINKS

CLICKABLE ON PDF ONLY

WHITE MODULE SELECTION GUIDE

COLOR MODULE SELECTION GUIDE

24V TRIO PRODUCT VIDEO

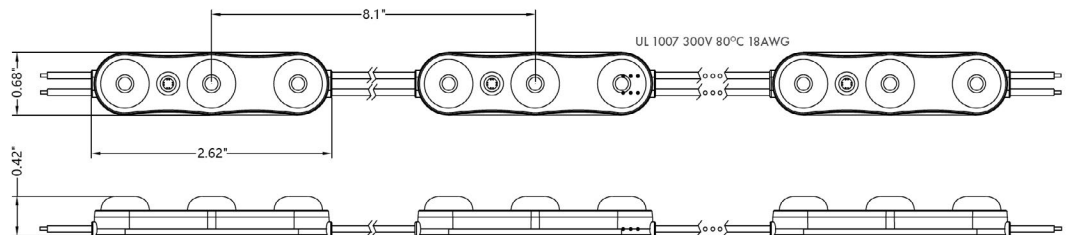

### FRANCE TRULUME LED MODULES NAVIGATION

12v NANO | 12v UNO | 12v DUO | 12v TRIO | 24v UNO | 24v DUO | 24v TRIO | 24v QUATTRO

WHITE LED COMPARISON CHART | COLOR LED COMPARISON CHART

