



Allanson

StormTight LED 3 Watt

Excellent for retrofitting fluorescent sign cabinets



Balanced Even Illumination

ACLW-CW-3W

Allanson's powerful 3 watt StormTight ACLW-CW-3W module can be spaced in rows at 12" and on our extruded aluminum rail which saves on installation costs. The rail also allows for the illumination of double sided signs by mounting the 3 watt modules back to back.

- 3 x 1.3 watts emitters – 427 lumens
- 12 volts DC
- Wide 155 degree beam angle for even light distribution
- Sealed construction for reliable all weather operation
- Max. load 14 modules per 60 watt power supply
- Proven metal back construction for long reliable life
- Aluminum printed circuit board for long emitter life
- Color Temperature cool white 6300K
- Recommended for 6" to 10" sign depth


Lumentra
Tested and Verified



ENERGY SAVINGS
LOOK FOR THIS MARK SIGNIFYING
ENERGY SAVING PRODUCTS
FROM ALLANSON.

MODULES-12-13



 **StormTightLED**



Allanson


StormTight LED 3 Watt

Specifications

Part Number	LEDs per Module	Lumens per Module	Watts per Module	Lumens per Watt	Modules per Foot	Lumens per Foot
ACLW-CW-3W	3	427	3.8	112	0.75	320
	Supply Voltage	Power Capacity		Packaging		
	DC 12 V	14 modules per CV125-120 power supply		18 modules per box		

Compatible Power Supplies	Part Number
	CV121 (12W)
	CV122-120 (24W)
	CV125-120 (60W)
	CV12125 (2x60W)

Modules Per power Supply	Power Supply	
	CV121	3
	CV122-120	6
	CV125-120	14
	CV12125	28

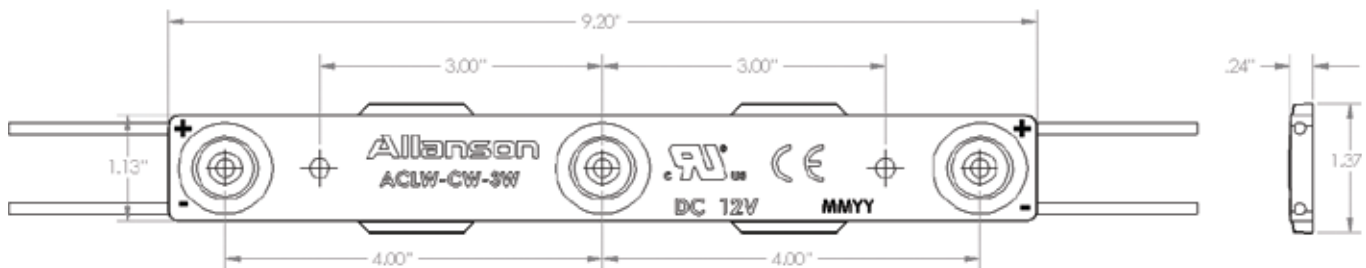

For all your population services contact us at led@allanson.com

Visit us at www.allansonled.com

US
Phone 1-800-559-3659
Fax 1-615-643-1890
Email customerservice@eballast.com

CANADA
 1-800-661-7251
 1-416-752-6717
custserv@allanson.com

